



Signature Sub 8

WARNING! IMPORTANT SAFETY INSTRUCTIONS

Read this manual carefully before plugging in.

Follow all instructions and heed all warnings.
Do not use this equipment near water.
Clean only with dry cloth.

Do not install near any heat sources such as radiators, heat registers, stoves, or other devices (including amplifiers) that produce heat.

Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the equipment.

Only use attachments/accessories specified by the manufacturer.
Unplug this equipment during lightning storms or when unused for long periods of time.

Refer all servicing to qualified service personnel. Servicing is required when the equipment has been damaged in any way. For example, when the power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the equipment, the equipment has been exposed to rain or moisture, does not operate normally, or has been dropped.

WARNING: To reduce the risk of fire or electric shock, do not expose this equipment to rain or moisture.

WARNING: Do not touch transformers during or immediately after operation of the equipment. They can be extremely hot and will cause burns. To avoid injuries, please allow parts to cool down completely after operation before handling.

Where an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable. Do not expose this equipment to dripping or splashing. No objects filled with liquid, such as vases, shall be placed on the equipment.



Welcome

Thank you for choosing System Audio.
We want to excite our users with
amazing sound experiences.

To get the most out of your new
subwoofer, I recommend that you
carefully read this guide before
connecting them.



Signature Sub 8: A truly
powerful and compact
subwoofer.

Why Signature Sub 8 is special

Signature Sub 8 is a subwoofer with a surprising sound. It's bigger, cleaner, deeper and more authentic than any other subwoofer of the same size.

Our technology moves speaker technology forward and sets new standards for sound experiences.


Signature Sub 8 is three times smaller than a traditional subwoofers. It shows how much innovation we have put into it.

A handwritten signature in black ink, reading "Ole Withthøft".

Ole Withthøft, founder of
System Audio

Inside the box

- 1 x Signature Sub 8
- 4 x Silicone feet
- 1 x Power Cord

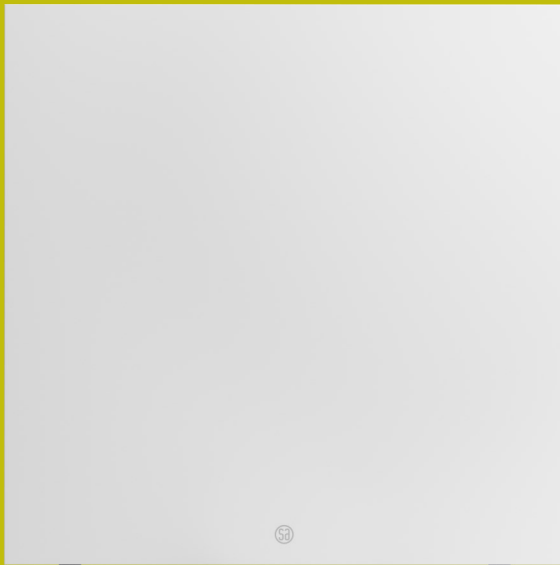

Good to know about your new subwoofer

Warranty

System Audio A/S provides a 2-year warranty against production defects and a 7-year warranty on drive units by registration at:

www.system-audio.com



The warranty does not cover abuse or electronic circuits. Repairs and service are performed by the dealer or affiliated service workshops. Any changes to the design will void the warranty.

Burning-in your new subwoofer

The subwoofer needs a 10-hour burn-in period and it has to play music for a few days to get the sound right.

Note:

- Spend time experimenting with speaker placement
- Never turn up the volume to a level where the sound is distorted.

Technical specifications

Amplifier Power: 550 Watts (RMS) / 650 Watts (PEAK)

Principle: Sealed cabinet

Woofers: 2x8" long-stroke

Frequency response (-3dB): 25-100 Hz

Crossover frequency: 25-100 Hz

Auto on / Standby: Yes

Phase regulation: Yes

Volume control: Yes

Line Inputs: Stereo Line-in (Analog RCA) & LFE-in, Cable not included.

Finish: White or Black satin

Dimensions (WxHxD) mm: 296x296x310mm

Weight: 15.8 kg

Connections

On/off/auto selector

ON: The subwoofer is permanently switched on.

AUTO: The subwoofer automatically switches ON with a sound signal and turns automatically to standby mode after 15-20 minutes in the absence of sound.

OFF: The subwoofer is OFF.

Phase switch

Frequency adjustment

Volume

Line level input

For connecting a stereo signal.


When using this connectivity option, the frequency adjustment is active.

LFE input

If your surround amplifier has an LFE output (Low Frequency Enhancement), it can be used by connecting it to the LFE input on the subwoofer.

When using this connectivity option, the crossover is bypassed to the subwoofer amplifier. Bass management must be undertaken by the surround amplifier / receiver.

Socket for power cable

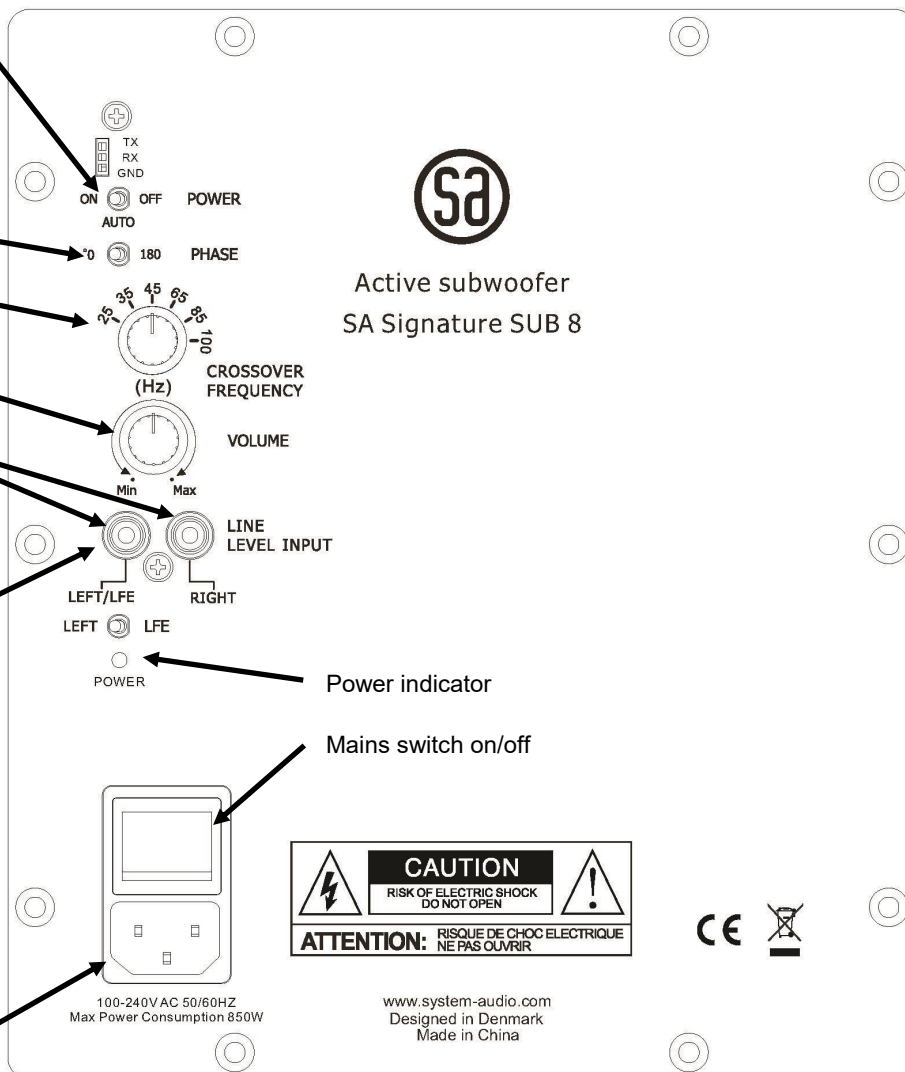

CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN

ATTENTION: RISQUE DE CHOC ELECTRIQUE
NE PAS OUVRIR

100-240V AC 50/60HZ
Max Power Consumption 850W

www.system-audio.com
Designed in Denmark
Made in China

